

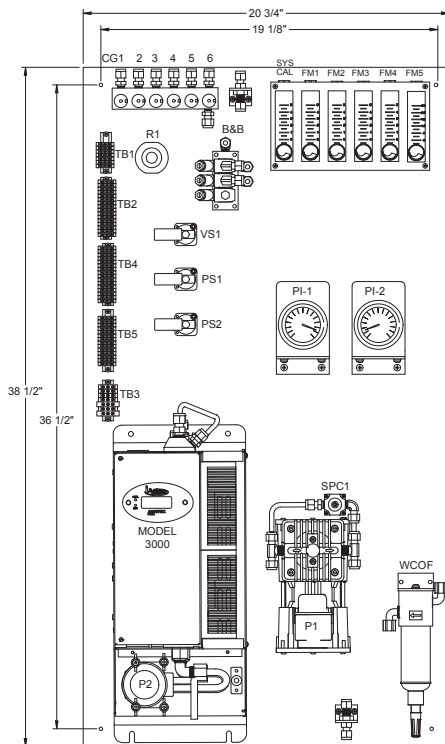


Universal Analyzers offers a simple solution for most applications utilizing our 3000 Series Sample Conditioning Plate. The 3000 Series Cooler uses Peltier Elements to Thermo Electrically reduce the dew point of a gas sample which rapidly condenses and removes the water, providing a dry sample for the gas analyzers.

The 3000 Series Sample Conditioning plate is 38.5" H by 20.75" W and comes standard with the following: Sample Pump, Peristaltic Pump, Inline Filter with Water Carry Over Sensor, Pressure Gauge, Vacuum Gauge, Alarm, Switches, Calibration Gas Regulator, Solenoid Valves and Analyzer/Bypass/Calibration Gas Flow Meters.

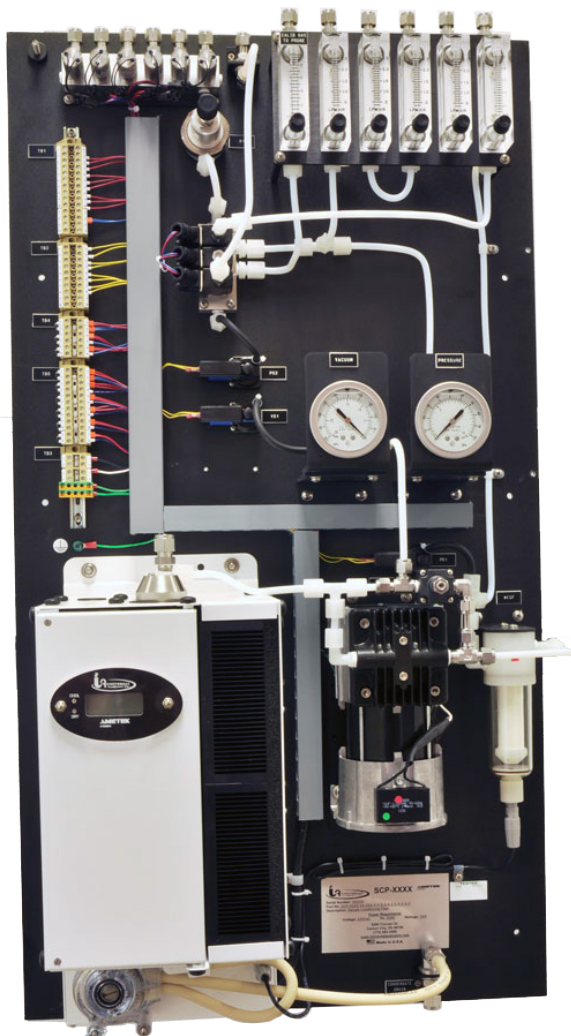

FRONT VIEW

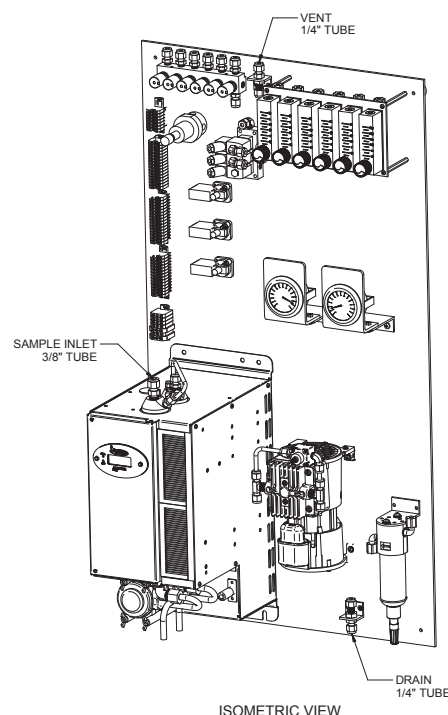

ISOMETRIC VIEW

COOLER CAPACITY DATA

	Ambient 77°F/25°C				Ambient 90°F/32°C				Ambient 105°F/41°C			
	Water Vapor				Water Vapor				Water Vapor			
	12%	15%	30%	50%	12%	15%	30%	50%	12%	15%	30%	50%
3040	6 l/m	5 l/m	2.8 l/m	1.4 l/m	5 l/m	4 l/m	2 l/m	1 l/m	2.8 l/m	2.4 l/m	1.2 l/m	0.6 l/m
3050	8 l/m	8 l/m	7 l/m	6 l/m	6 l/m	6 l/m	5.5 l/m	4.5 l/m	3 l/m	3 l/m	2.5 l/m	2 l/m
3080	10 l/m	8 l/m	4 l/m	2 l/m	8 l/m	7 l/m	3.5 l/m	1.8 l/m	4.6 l/m	4 l/m	2.2 l/m	1.1 l/m



3000 Series Sample Conditioning Plate

Standard Plate includes: Sample Pump, Peristaltic Pump, Vacuum & Pressure Gauges, Vacuum & Pressure Switches, Analyzer/Bypass/Calibration Gas Flow Meters, Zero & Span Calibration Gas Solenoids, Calibration Gas Regulator and Condensate Carry Over Sensor with Filter

Lead Time	Integration Options
3 wks	SCP Integrate 3000 cooler on a 20.75"W x 38.5"H powder coated plate with accessories selected below
	Cooler (Part Number Configurator: SCP 3000)
	Sample Conditioning Plate
	3040 10" Active (1 Heat Exchanger)
	3050 10" Passive/Active (2 Heat Exchangers)
	3080 10" Active/Active Single Control (2 Heat Exchangers)
	Heat Exchangers Material (Price per Heat Exchanger)
	SS 316 Stainless Steel:
	PV Glass/Kynar:
	C Hastelloy C276:
+1 wk	ST Teflon coated 316 Stainless Steel:
	SW 316 Welded Stainless Steel: (High Pressure)
	SN SilcoNert™ 2000 coated 316 Stainless Steel:
	KK Kynar/ Kynar:
	Voltage & Area Location Classification
	115 115 VAC 50/60 Hz; General Purpose (GP) Area
+1 wk	230 230 VAC 50/60 Hz; General Purpose (GP) Area
	Sample Pump with one pressure controller.
	SP1 Single Head Pump
	SP2 Dual Head Pump
	Calibration Gas Solenoids (Standard panel includes two calibration gas solenoids)
	Cal2 No Additional Calibration Gas Solenoids (Base Panel Includes 2)
	Cal3 1 Additional Calibration Gas Solenoid (3 Total)
	Cal4 2 Additional Calibration Gas Solenoid (4 Total)
	Cal5 3 Additional Calibration Gas Solenoid (5 Total)
	Cal6 4 Additional Calibration Gas Solenoid (6 Total)
	Analyzer Flow Meter Options
	FM1 1 Base Panel 2.5lpm Flow Meter = Panel with 1 Analyzer Meter, 1 Bypass Meter, 1 Cal Gas
	FM2 1 Additional 2.5 lpm Flow Meter = Panel with 2 Analyzer Meters, 1 Bypass Meter, 1 Cal Gas
	FM3 2 Additional 2.5 lpm Flow Meter = Panel with 3 Analyzer Meters, 1 Bypass Meter, 1 Cal Gas
	FM4 3 Additional 2.5 lpm Flow Meter = Panel with 4 Analyzer Meters, 1 Bypass Meter, 1 Cal Gas
	Peristaltic Tubing Options
+1 wk	PP1 Phar-Med High Pressure Pump Tubing (\$69/head)
	PP2 Viton Pump Tubing (per head)
	PP3 Tygon Fuel Grade Tubing (per head)
	PP4 Norprene Food Grade Tubing (per head)
	N No Options Included
SCP- 3080 -SS -115 -SP1 -Cal2 -FM1 -N	--- Sample Part Number

* Lead Times are not compounded. Lead time is Cooler + longest option.

TECHNICAL SPECIFICATIONS

Maximum Inlet Sample Temperature:	316SS Heat Exchanger: 700°F (370°C.)/Kynar-Glass Heat Exchanger: 280°F (138°C.)
Maximum Inlet Gas Dew Point:	194°F. (82°C)*
Maximum Inlet Water Concentration:	70%*
Maximum Ambient Temperature:	105°F (41°C.)*
Maximum Cooling Power:	126 BTU'S/Hr. (120 kJ/Hr.) (Model 3040) 126 BTU'S/Hr. (120 kJ/Hr.) (Model 3050 2nd Stage) 252 BTU'S/Hr. (240 kJ/Hr.) (Model 3080)
Outlet Sample Dew Point:	39°F (4°C.)
Maximum Input Power:	700 WATTS**
Voltage:	95-125 VAC, 50/60 Hz or 190-250 VAC, 50/60 Hz
Electrical Classification:	Nema 1 / General Purpose
Soluble Gas Removal Rates:	NO 0% LOSS NO2 <10% LOSS SO2 < 2% LOSS CO 0% LOSS CO2 < 2% LOSS

*At reduced flow rates, see capacity chart.

**Wattage dependant on selected cooler, contact factory for selected cooler wattage.

© 2014, by AMETEK, Inc. All rights reserved • 3000SCS-FLYR • 11 AUG 15



USA • BELGIUM • CHINA • SINGAPORE
sales.uai-bat@ametec.com • www.universalanalyzers.com

